


HS2506G-E PUR 桶膠機 HS2506G-E PUR Drum Melter

產品規格(SPECIFICATION):

項目 Item	UNIT	2506G-E
加熱槽容量 Tank capacity	GALLON	5
最大吐出量 Glue flowing rate	G/MIN	850
最大黏稠度 Max.cps	CPS	200,000
最大操作溫度 Max.operation temp	℃	220
保溫管及噴槍數目 Sets of hose & gun	SET	1~2
最大耗電量 Max.power rate	WATT	7,000
電力需求 Power requirement		380V/50HZ/3Φ
尺寸 Dimension:L×W×H	MM	860×750×1350
重量 Weight	KG	254

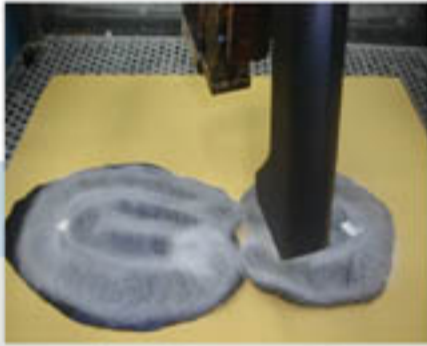

螺旋狀噴霧噴在橡膠大底

Spiral spray on rubber outsole /stock fitting



作為補膠機為滾輪機供膠

Working as a pre-melter for roller coater/stockfitting

產品特性:

1. 加熱圓盤表面鐵弗龍處理，密封環表面也採用鐵弗龍材質，可有效防止任何物質粘著，清洗容易。
2. PID微電腦控溫器，精確度±1℃。
3. 二段保溫設定，重新加熱時間縮短，減少待機時間及節省能源。
4. 全開式流量閥反應快速，有效提高出膠速率。精密電子變頻器，出膠量調整精確快速。料筒定位機構，換筒簡單快速，可配合機械手臂自動上膠。用于成型大底貼合、汽車車燈貼合、汽車內裝。可作為自動化作業或作為補膠系統。

FEATURE :

1. Surfaces of heating tray & o-ring are coated with teflon.
This can avoid any unnecessary adhesion and ensures convenience in cleaning.
2. Precision of PID temperature controller reaches ±1℃. 2-class temp.
Control mechanism greatly reduce reheating time, standby time and can save power.
3. Fully open flow valve reacts quickly, can effectively increase flow rate.
Flow rate can be precisely and quickly controlled.
4. Tank level mechanism ensures convenience in tank reloading.
5. This machine usually works as a pre-melter to work together with robot, manual handgun or roller coater for automatic or manual operation.